

CVT-765

capacitor voltage transformer tester



Vanguard Instruments Company, Inc.
www.vanguard-instruments.com



CVT-765


capacitor voltage transformer tester

Product Overview

The CVT-765 can measure the turns-ratios of Capacitor Voltage Transformers ranging from 75 to 15,000. The measured turns-ratio, winding polarity, and winding phase angle are displayed on the unit's LCD screen.

A transformer's nameplate voltages can also be entered, and the CVT-765 will display the turns-ratio percentage error by comparing the test results with the nameplate voltage values. This convenient feature eliminates any user calculation errors when testing transformers.

CVT-765 connections

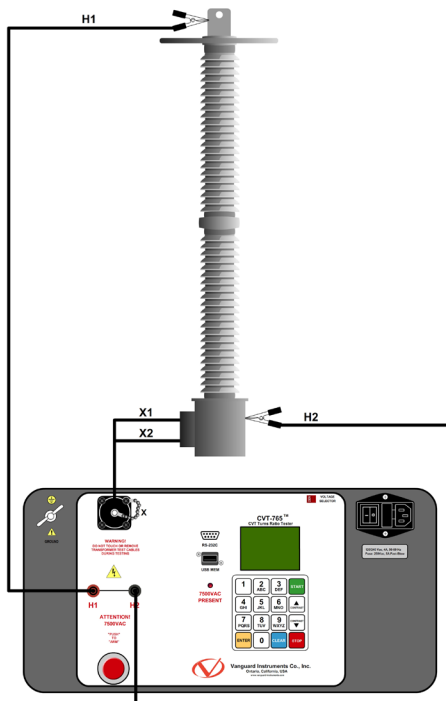

The Vanguard CVT-765 is a microprocessor-based, single phase, automatic, transformer turns-ratio tester. This portable test unit is specifically designed to measure the turns-ratios of Capacitor Voltage Transformers (CVT's).

The CVT-765 determines the transformer turns-ratio using the IEEE C57.12.90 measuring method. It uses a 7440Vac excitation voltage source to accurately measure the turns-ratio of Capacitor Voltage Transformers with a rating of up to 765KV. The transformer turns-ratio is determined by precisely measuring the voltages across the unloaded transformer windings.

User Interface

The CVT-765 features a back-lit LCD (128 x 64 pixels) screen that is viewable in bright sunlight and low-light conditions. A rugged 16-key membrane keypad is used to enter test information and to operate the unit.

Test Record Storage

The CVT-765 can store 128 records of 33 readings internally, and up to 999 test records on an external USB Flash drive. Test records can be recalled using the included Transformer Analysis PC Software.

Computer Interface

Windows®-based Transformer Analysis software is provided with each unit. Using this software, the user can retrieve test records from the CVT-765 via the RS-232C interface or by using a USB Flash drive, analyze test results, and print test results on a desktop printer. Test results are automatically exported to PDF, EXCEL, and XML formats.

Operating Voltages

The CVT-765 can be operated from 100 – 120 Vac or 220 – 240 Vac. The proper voltage can be set using the voltage selection switch on the front panel.


outstanding features

- Can test CVT's rated up to 765 KV
- Displays turns ratios from 75 – 15,000 : 1
- Calculates turns ratio percentage error when nameplate voltages are provided
- Displays winding polarity and phase angle

ordering information

Part No.	Description
9025-UC	CVT-765 and test cables

CVT-765 Features

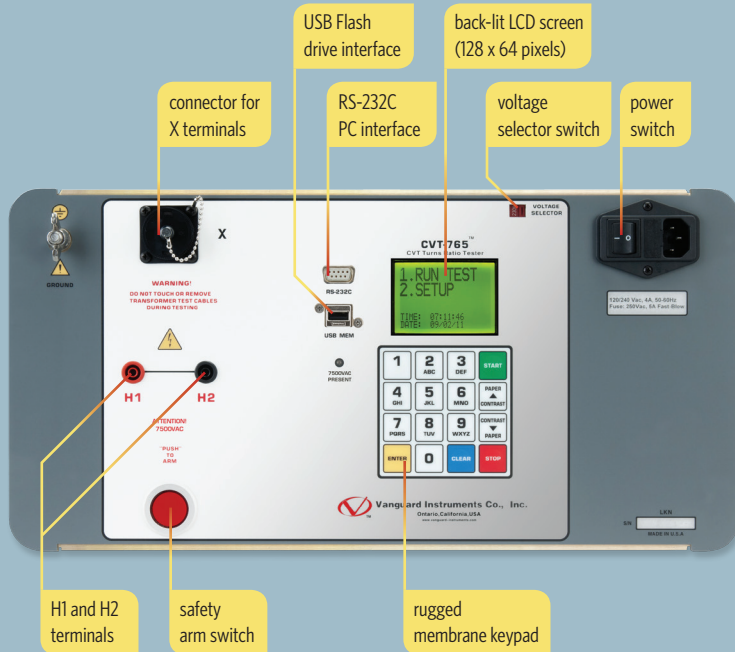

sample test results



Measured Turns Ratio
Phase Angle
Percentage Error

CVT-765 technical specifications

	physical specifications	Dimensions: 19½" W x 12"H x 17" D (49.5 cm x 30.5 cm x 43.2 cm) Weight: 65 lbs. (29.5 Kg)		input power	100-120 Vac or 220-240 Vac (selectable), 50/60 Hz
	measuring method	ANSI/IEEE C57.12.90		ratio measuring range	75 – 15,000 : 1 (5-digit resolution)
	turns-ratio accuracy	75–5,000 (±0.25%), 5,001–10,000 (±0.35%), 10,001–15,000 (±0.5%)		test voltage	7440 Vac @ 50 mA
	phase angle measurement	0 – 360 degrees accuracy: ±0.2 degree		polarity reading	in-phase or out of phase indication
	display	back-lit LCD screen (128 x 64 pixels) viewable in bright sunlight and low-light levels		computer interfaces	one RS-232C PC interface, one USB Flash drive interface
	internal test record storage	128 records; each record can contain up to 33 readings		external test record storage	Up to 999 test records on external USB Flash drive
	pc software	Windows®-based transformer turns-ratio analysis software is included with purchase			
	safety	designed to meet IEC 61010A-1 and CAN/CSA C22.2 No. 1010.1-92 standards		humidity	90% RH @ 40°C (104°F) non-condensing
	temperature	Operating: -10°C to +50°C (+15°F to +122°F) Storage: -30°C to +70°C (-22°F to +158°F)		altitude	2,000 m (6,562 ft) to full safety specifications
	cables	one 50 ft. (15.24m) H cable, one 15 ft. (4.57m) X cable, one power cable, one safety ground cable		warranty	one year on parts and labor

NOTE : the above specifications are valid at nominal voltage and ambient temperature of +25°C (+77°F). Specifications are subject to change without notice.



Instruments designed and developed by the hearts and minds of utility electricians around the world.

Vanguard Instruments Company (VIC), was founded in 1991. Currently, our 28,000 square-foot facility houses Administration, Design & Engineering, and Manufacturing operations. From its inception, VIC's vision was, and is to develop and manufacture innovative test equipment for use in testing substation EHV circuit breakers and other electrical apparatus.

The first VIC product was a computerized circuit breaker analyzer, which was a resounding success. It became the forerunner of an entire series of circuit breaker test equipment. Since its beginning, VIC's product line has expanded to include microcomputer-based, precision micro-ohmmeters, single and three phase transformer winding turns-ratio testers, transformer winding-resistance meters, mega-ohm resistance meters, and a variety of other electrical utility maintenance support products.

VIC's performance-oriented products are well suited for the utility industry. They are rugged, reliable, accurate, user friendly, and most are computer controlled. Computer control, with innovative programming, provides many automated testing functions. VIC's instruments eliminate tedious and time-consuming operations, while providing fast, complex, test-result calculations. Errors are reduced and the need to memorize long sequences of procedural steps is eliminated. Every VIC instrument is competitively priced and is covered by a liberal warranty.



Vanguard Instruments Company, Inc.

1520 S. Hellman Avenue • Ontario, California 91761, USA
Phone 909-923-9390 • Fax 909-923-9391
www.vanguard-instruments.com